
T250

Tubular or round Laser source

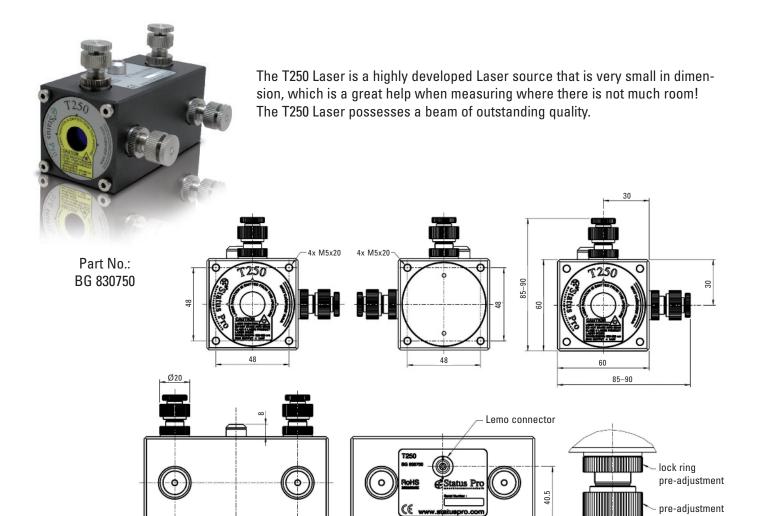

Technical Data

Laser type:	Class 2a	Socket type:	Lemo
Laser output:	0.5 mW (max. < 1mW)	Housing:	Aluminium, anodisied
Laser frequency:	630-680 nm	Protection class:	IP 54
Laser range:	100 m	Dimensions:	120 x 90 x 90 mm
Temperature range:	0° - 50°C	Weight:	950 g
		Attachment possibilities:	Four M5 threads on the Front,

Attachment possibilities: Four M5 threads on the Front, Back and Underside.

C All Status Pro Laser and Receiver Instruments are developed and manufactured according to the following CE Standards: EN 55 011, EN 55 022, EN 61 000-4-2, EN 61 000-4-3, EN 60 335.

This document was prepared with the utmost of care. Changes and errors cannot be completely avoided.

80

TD1052 E 03/2012

vernier

adjustment

