


T330

Self levelling Sweep Laser



Part No.: BG 830203

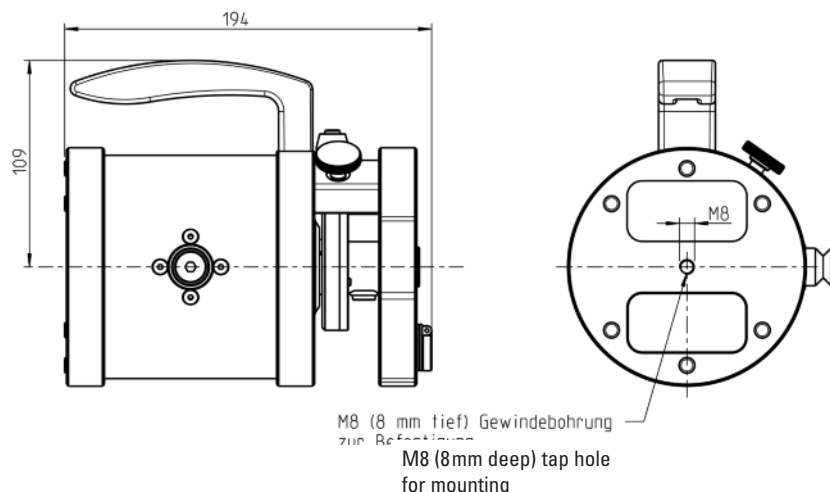

The T330 is a precision Laser self-levelling Laser Transmitter. The unique fiberoptical laser source is exactly round and of Gaussian intensity distribution. This facilitates exact position measurements. The T330 generates two orthogonal optically coupled Laser beams. It defines a reference plane in spaces for a wide range of geometrical measurements from simple Levelling application, straightness or flatness to roll parallelism.

Technical Data

Laser protection class:	2 (EN 60825-1)	Weight:	2400 g
Interface:	RS 485 & IR	Static temperature coefficient:	0,001 mRad/K
Measuring distance:	0 to 50 metres	Dynamic temperature coefficient:	0,005 mRad/K/min
Prism error:	< 0,02 mRad	Temperature:	0°C to +50°C
Step error:	± 0,05 mm	Air humidity:	20% to 80%
Conical error:	± 0,01 mRad	Power supply:	8 batteries 1.5 V, type Mignon (AA/LR6) or A/C adapter
Self-levelling accuracy:	± 0,02 mRad	Running time:	> 10 hours permanent operation with batteries / rechargeable batteries (depending on capacity)
Dimensions:	125 x 170 x 185 mm		

CE All Status Pro Laser and Receiver Instruments are developed and manufactured according to the following CE Standards: EN 55 011, EN 55 022, EN 61 000-4-2, EN 61 000-4-3, EN 60 335.

This document was prepared with the utmost of care. Changes and errors cannot be completely avoided.

TD1051 E 08/2013